

THE WORLD'S 1ST ONBOARD 12-VOLT PRESSURE WASHER



- **CLEAN ANYWHERE**
- **QUIET OPERATION**
- **EASY INSTALL**
- **AVAILABLE 600 PSI & 1000 PSI AT PUMP HEAD**

Cleaning has never been EASIER.

Pressure Mate (patent pending) uses your boat's freshwater tank to provide a powerful, quiet and reliable performance blasting through blood, dirt and slime faster and easier without damaging gel coat or upholstery. Proprietary nozzle tip can be used with lance/ wand or directly on spray gun for easy access to all those hard to reach places.

STANDARD KIT

- Pump with all fittings available in non-coated aluminum or coated in white
- Quick disconnect spray gun with lance
- 25' Spray hose
- PVC coated solenoid, marine CU & UL

Standard kit is a direct connection to pump.

REMOTE LOCATION KIT

- Bulkhead fitting
- Adapter
- Additional high pressure hose


Upgrade kit allows the customer to attach the spray hose to the bulkhead fitting mounted at a remote location chosen by the manufacturer.

CUSTOM HOSE + LANCE LENGTHS AVAILABLE UPON REQUEST.

STANDARD KIT

- PUMP WITH ALL FITTINGS AVAILABLE IN NON-COATED ALUMINUM OR COATED IN WHITE
- QUICK DISCONNECT SPRAY GUN WITH LANCE
- 25' SPRAY HOSE
- PVC COATED SOLENOID, MARINE CU & UL

BODY.....ANODIZED ALUMINUM
PLUNGER.....304SS
VALVES.....STAINLESS STEEL
FASTENERS.....STAINLESS STEEL

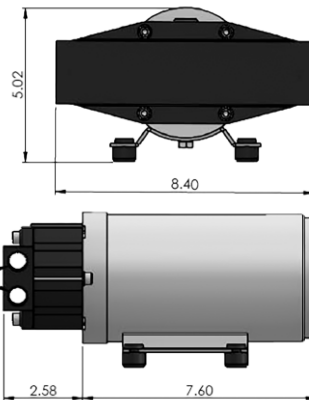


12 Volt:

- 600 PSI AT PUMP HEAD
- 1.1 GPM
- STAINLESS STEEL QUICK DISCONNECT FITTINGS
- DURABILITY
- COMPACT DESIGN
- ENHANCED PRIMING

*Also avail. in 24 Volt

120 Volt AC

- 1000 PSI AT PUMP HEAD
- 1.6 GPM
- STAINLESS STEEL QUICK DISCONNECT FITTINGS
- DURABILITY
- COMPACT DESIGN
- ENHANCED PRIMING

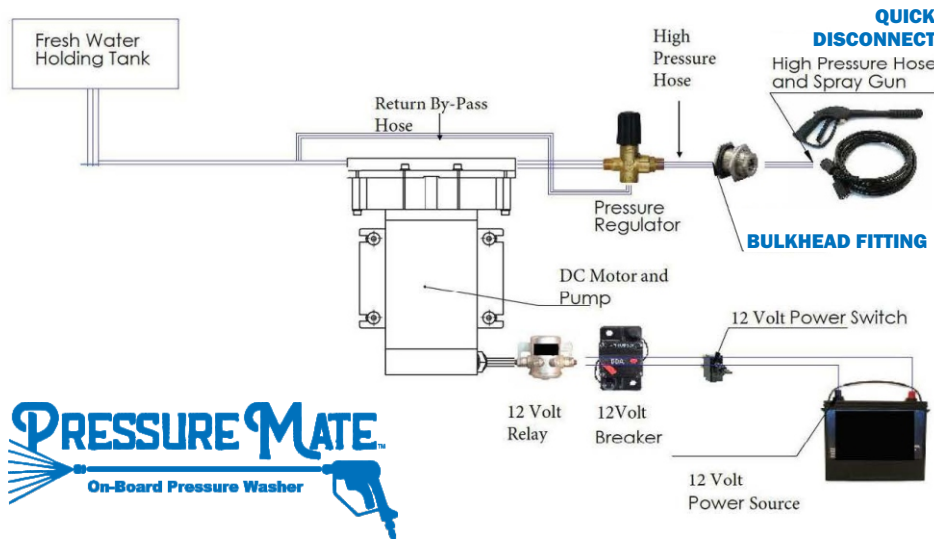

REMOTE LOCATION KIT

- BULKHEAD FITTING
- ADAPTER
- ADDITIONAL HIGH PRESSURE HOSE

Upgrade kit allows the customer to attach the spray hose to the bulkhead fitting mounted at a remote location chosen by the manufacturer.



INSTALLATION MOUNTING

Pump motor set can be mounted in any position EXCEPT with pump head higher than motor. To minimize amp draw, noise and vibration, use appropriate flexible hose to inlet and discharge ports.

LOCATION

The pumping system can be mounted where it is visible, but it must be protected from rain, dirt and chemical spray or splashing. The pump must never be installed on a vertical surface with the pump head higher than motor, like a capital letter "T", for example.

SIMPLE, SINGLE PLUNGER PUMP

OPEN FLOW.....TO 3.7 GPM
SEALS.....U-CUP
O-RINGS.....VITON
INLET PORTS (2).....3/8" F NPT
DISCHARGE PORTS (2).....3/8" F NPT
MAX FLUID TEMP.....TO 140° F
RPM (MAX).....2000

CUSTOM HOSE + LANCE LENGTHS AVAILABLE UPON REQUEST.



For additional information, please contact your Haimes Coleman Group Rep.,
e-mail reps@haimescolemangrp.com or call 954.845.0411